

**SRPA SERIES SLOT RECESSED SELECTABLE PANEL**

Client:  
 Project:  
 Type:  
 Quantity:

**CONSTRUCTION**

Low profile extruded aluminum frame, multiple wiring entrances on driver enclosure for easy access. Suitable for installation into T-grid ceilings.

**OPTICS**

Edgelit design provides exceptional lighting distribution. Frosted PMMA lens offers edge to edge illumination without pixilation or bright spots.

**ELECTRICAL**

Long-life, high-efficacy, micro-power LEDs, illumination for extended service life. Greater than 70% LED lumen maintenance at 100,000 hours (L70>100,000).

Selectable lumen and CCT technology allows easy field-adjustable capability, luminaire ships with maximum output and 4000K CCT setting.

All CCTs are within 3 MacAdam ellipses, 80CRI.

Driver operates at 120-277V input, 0-10V dimmable driver, dim-to-off.

**MOUNTING**

Designed to accommodate lay-in ceilings, Slot T, and T-bar suspension system for 5/8" and 3/8" width.

**FINISH**

90% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.

**CERTIFICATION**

Option for "Assembled in America" upon request.


IC Rated, suitable for Damp location.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

For Emergency application, equipment with UL924 certified battery packs.

**WARRANTY**

5 year warranty, see Limited Warranty for additional information.

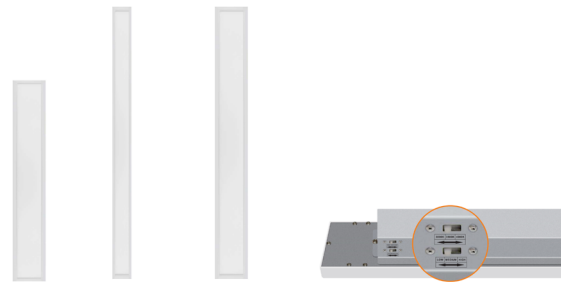

4" x 4'    2" x 6'    4" x 6'    Output / CCT Selector

**SHIPPING DATA**

Product	Measurement	Weight
SRPA-44 (2-pack)	50"L x 7"W x 6"H	11 lb
SRPA-26 (2-pack)	26"L x 9"W x 6"H	9 lb
SRPA-46 (2-pack)	50"L x 9"W x 6"H	15 lb



**SRPA SERIES SLOT RECESSED SELECTABLE PANEL**

ORDER INFORMATION				EXAMPLE: SRPA 44SC-EDGELIT	
FIXTURE	SERIES	MODEL	FINISH	INPUT	MOUNTING
	SRPA		blank	blank	blank
ACCESSORIES OPTIONS					

<b>A</b>	<b>SERIES</b>	
	SRPA	Slot Recessed Selectable Panel

<b>B</b>	<b>MODEL</b>				
	Code	Size	Power	CCT	lm/W (avg.)
	44SC-EDGELIT	4" x 4'	20W / 30W / 40W	3000K / 3500K / 4000K	85lm/W
	26SC-EDGELIT	2" x 6'	10W / 15W / 20W	3000K / 3500K / 4000K	85lm/W
	46SC-EDGELIT	4" x 6'	20W / 30W / 40W	3000K / 3500K / 4000K	85lm/W

<b>C</b>	<b>FINISH</b>	
	WH	White

<b>D</b>	<b>INPUT</b>	
	blank	120-277V, 0-10V Dimming

<b>E</b>	<b>MOUNTING</b>	
	blank	Standard lay-in

<b>F</b>	<b>ACCESSORIES/OPTIONS (SEE PG. 5 FOR EMB SPEC)</b>	
	AIA	Assembled in America, compliant with BAA (COTS)
	-C	6-Foot Flex
	EMB-H08170	External EMB 8W (120-277V Input)
	EMB-H18170	External EMB 18W (120-277V Input)

**SRPA SERIES SLOT RECESSED SELECTABLE PANEL**

**DIMENSIONS**

Model	L	W	D
SRPA-44SC	47.76" (1213mm)	5.75" (146mm)	2.17" (55mm)
SRPA-26SC	23.70" (602mm)	3.74" (95mm)	2.17" (55mm)
SRPA-46SC	47.76" (1213mm)	5.75" (146mm)	2.17" (55mm)



**SRPA SERIES SLOT RECESSED SELECTABLE PANEL**


**PERFORMANCE DATA**

**SRPA-44SC**

IES: SRPA-44SC @ 40W 3500K

Zone	Lumen	Luminaire%
0-30	1070	30.70
0-40	1745	50
0-60	2914	83.50
0-90	3490	100
0-180	3490	100

Lumen: 3490  
 Input Watts: 40 W  
 Efficacy: 87.3 LPW

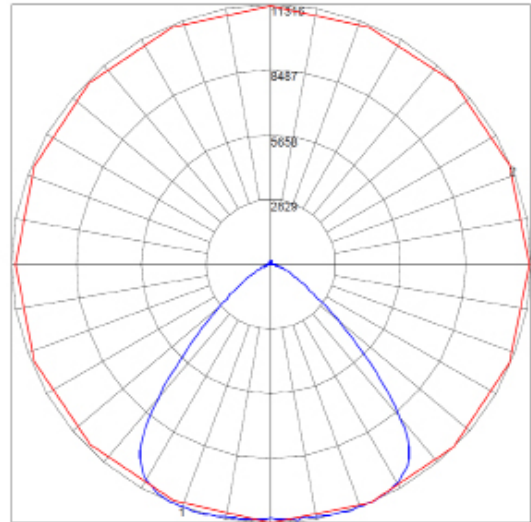

Maximum Candela = 1386.46 Located At Horizontal Angle = 90, Vertical Angle = 1  
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

SYSTEM WATTS	SIZE	VOLTAGE	LUMEN	LPW (avg.)
10W	SRPA-26SC	120-277V	850	85
15W	SRPA-26SC	120-277V	1275	85
20W	SRPA-26SC SRPA-44SC SRPA-46SC	120-277V	1700	85
30W	SRPA-44SC SRPA-46SC	120-277V	2550	85
40W	SRPA-44SC SRPA-46SC	120-277V	3400	85

**SRPA SERIES SLOT RECESSED SELECTABLE PANEL**

**EMB SPEC**

Model	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-H08170	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install
EMB-H18170	90mins	100-347VAC	170VDC	18W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

