

ILA SERIES SELECTABLE LINEAR STRIP

Client:
Project:
Type:
Quantity:

CONSTRUCTION

8-Foot compact design channel formed from cold-rolled 22-gauge steel with matte White finish. 1/2" knockout made on end cap for sensor or surface conduit mount.

Optional version: removable socket cap allows end-to-end continuous row mount.

OPTICS

End-to-end U-shaped diffused polycarbonate (PC) lens standard.

ELECTRICAL

Delivered 130lm/W efficacy LEDs offer 80+ color rendering index (CRI), L70 >56,000 hours expected life.

-40°C up to 50°C (-40°F up to 122°F) maximum operating temperature.

Selectable lumen and CCT technology allows easy field-adjustable capability.

Luminaire ships with maximum output and 4000K CCT setting.

Driver operates at 120-277V input, 0-10V dimmable driver, dimmable down to 10%.

SENSORS (OPTIONAL)

SENSOR-819-O1 End mount on/off motion sensor with lowbay lens.

SENSOR-819-D1 End mount on/off/dimming and photocell sensor with lowbay lens.

SENSOR-BLE-819 End mount ALS CONTROL bluetooth on/off motion sensor lowbay lens.

SENSOR-BLE-7 Integral Microwave Bluetooth Wireless Motion/on/off/dimming/photosensing.

SENSOR-ANT-7 Integral Microwave Motion/on/off/dimming/photosensing.

CONTROL-AVI-LVFA AVI-ON Bluetooth Mesh Controller.

MOUNTING

Designed for direct wire or as a portable luminaire with use of power cord.*

Surface mountable underneath electrical box (5" OD beauty ring included).

Integral V hooks for chain mount included.**

Option "-LINK": Fixture made with removable end cap, end-to-end connector included, IL8A linkable up to 10 luminaires.

STANDARD FINISH

Corrosion resistant semi-gloss White finish, suitable for damp location.

CERTIFICATION

Damp location label standard.

Meets Buy America Act requirements.

All luminaires are built to UL1598 standards and bear appropriate cULus labels.

For Emergency application, equipment with UL924 certified battery packs.

DLC® Premium (DesignLights Consortium Qualified)

WARRANTY

5 year warranty, see Limited Warranty for additional information.



SHIPPING DATA

Product	Measurement	Weight
IL8A	96"L x 3"W x 3.03"H	10 lb



ILA SERIES SELECTABLE LINEAR STRIP

ORDER INFORMATION					EXAMPLE: IL 8A-SWSC WH UD
Fixture	Series	Size	Finish	Input	
	IL		WH	UD	
Accessories Options					
A	SERIES				
	IL	Linear Strips			
B	SIZE				
	Code	Size	Power	CCT	
	8A-SWSC	8-Foot	48W / 68W / 90W	3500K / 4000K / 5000K	
C	FINISH				
	WH	White			
D	INPUT				
	UD	110-277V, 0-10V Dimmable			
E	ACCESSORIES/OPTIONS				
	AIA	Assembled in America, compliant with BAA (COTS)			
	BRACKET-IL8A	Row Mount Bracket			
	MOUNT-HIGHBAY-CK	Gripple Hanger Kit			
	EMB-8W-B**	8W Emergency Battery 170VDC Forward Voltage			
	SENSOR-819-O1*	End mount on/off motion sensor with lowbay lens			
	SENSOR-819-D1*	End mount on/off/dimming and photocell sensor with lowbay lens			
	SENSOR-BLE-819-L1*	End Mount PIR Bluetooth Daylight Harvesting Sensor (ALS Control Mobile App) / L1: up to 20FT			
	SENSOR-BLE-7*	Integral Microwave Bluetooth Wireless Bi-Level Motion Sensor (ALS Control Mobile App)			
	SENSOR-ANT-7*	Integral Microwave Bi-Level Motion Sensor			
	CONTROL-AVI-LVFA*	AVI-ON Bluetooth Mesh Control System			
	SURGE-LSP4-U	10kV inline Surge Protection for Universal input			
	REMOTE-RC100	Handheld Remote Commissioning Tool for SENSOR-ANT, 819 Series			
	-CORD	18-3 300V 6 Foot Cord			
	-PLUG	18-3 300V 6 Foot and 3 Prong Plug			

*see page 5 for sensor


**see page 6 for emb spec

ILA SERIES

SELECTABLE LINEAR STRIP

DIMENSIONS

Model	L	W	H	OD
IL8A	93.76" (2382mm)	2.57" (65mm)	2.68" (68mm)	-
Beauty Ring	-	-	-	ø 5.00" (127mm)

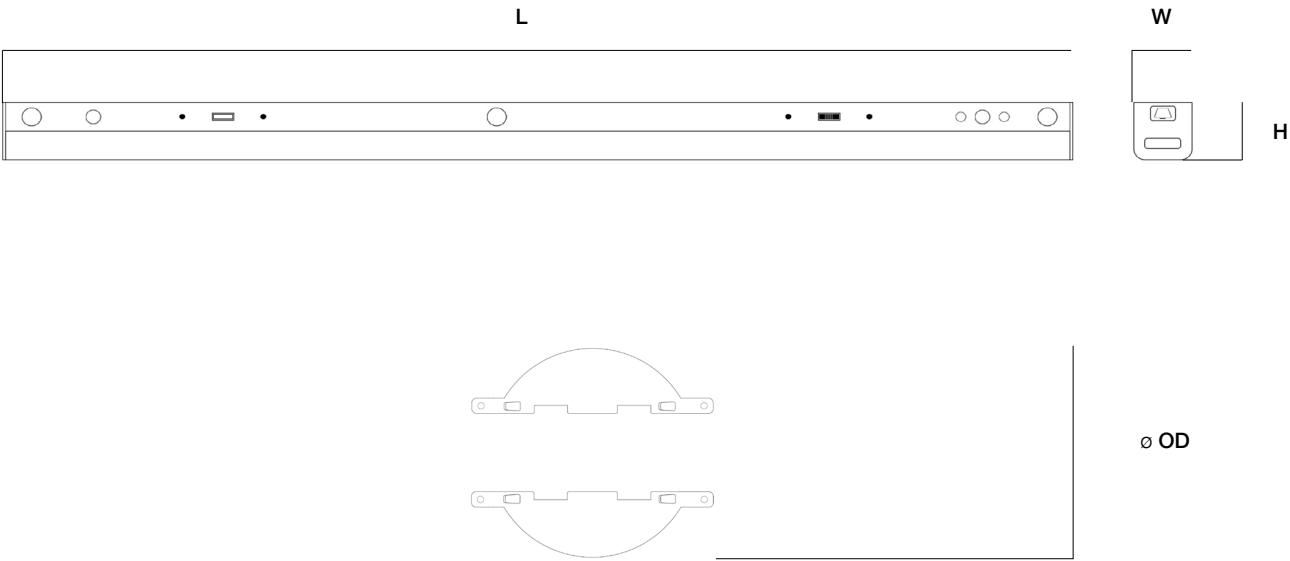

Surface Mount Beauty Ring

Mounts on back of the fixture

ILA SERIES SELECTABLE LINEAR STRIP

PERFORMANCE DATA

SYSTEM WATTS	SIZE	VOLTAGE	LUMEN	LPW	QTY ON PALLET
18W	2-Foot	120-277V	2340	130	380
22W	2-Foot	120-277V	2862	130	380
22W	4-Foot	120-277V	2862	130	240
28W	4-Foot	120-277V	3643	130	240
36W	4-Foot	120-277V	4684	130	240
44W	4-Foot	120-277V	5727	130	240
48W	8-Foot	120-277V	6590	137	100
68W	8-Foot	120-277V	9336	137	100
90W	8-Foot	120-277V	12062	134	100

ILA SERIES SELECTABLE LINEAR STRIP

SENSOR SPEC

Model	Type	Mounting	Coverage	Input	Function	Programmable
SENSOR-819-O1	PIR	20FT	30FT radius	Universal	On/Off	REMOTE-RC100
SENSOR-819-D1	PIR	20FT	30FT radius	Universal	On/Off/Dimming	REMOTE-RC100
SENSOR-BLE-819 (see page 8 for detail)	PIR	L1 - 20FT	30FT radius	Universal	Bluetooth Mesh On/Off/Dimming Daylight Harvesting	ALS Control Bluetooth Mobile App
SENSOR-BLE-7 (see page 9 for detail)	Microwave	up to 13FT	17FT radius	12V DC	Bluetooth Mesh On/Off/Dimming Motion Daylight Sensing	ALS Control Bluetooth Mobile App
SENSOR-ANT-7	Microwave	up to 12FT	17FT radius	10V DC	On/Off/Dimming Motion Daylight Sensing	REMOTE-RC100
CONTROL-AVI-LVFA (see page 7 for detail)	Fixture Controller	-	-	12V DC	Bluetooth Mesh On/Off/Dimming Scheduling	AVI-ON Bluetooth Mobile App



SENSOR-819-XX
SENSOR-BLE-819



SENSOR-BLE-7
SENSOR-ANT-7




CONTROL-AVI-LVFA

ILA SERIES SELECTABLE LINEAR STRIP

EMB SPEC

Model	Compatible Fixture	Battery Capacity	Input	Output	Output Power	Operating Temp	Installation
EMB-8W-B	IL8A-SWSC	90mins	100-347VAC	170VDC	8W	0°C ~ 50°C 32°F ~ 122°F	Factory or Field Install

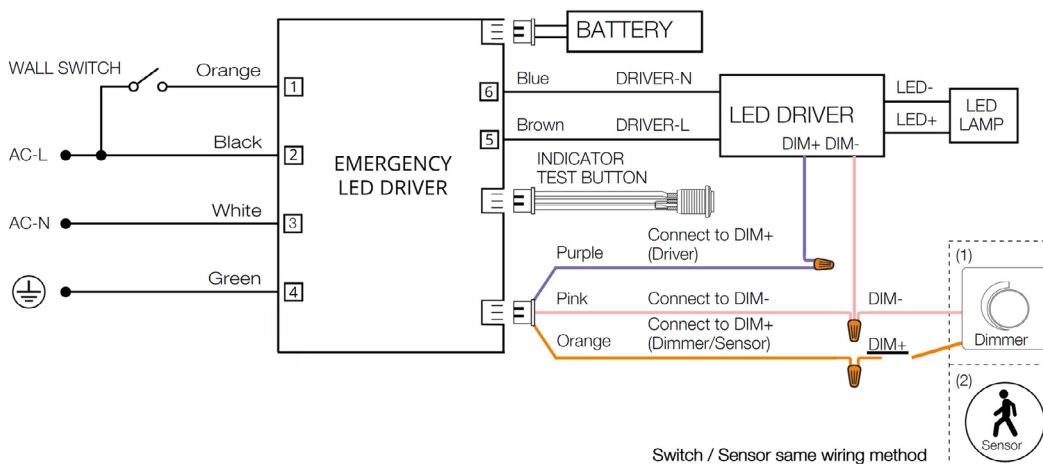

ILA SERIES SELECTABLE LINEAR STRIP

CONTROL-AVI-LVFA SPEC

Status LEDs & Config Button

Quick and easy validation of wiring and network

Direct Connect™ Sensor Port

Simple and cost-effective addition to Avi-on sensors

Terminal Blocks & Mounting Tabs

Faster, easier and lower cost installation eliminating connectors



Internal Antenna

Improved performance and eliminates risk of accidentally cutting a hanging wire


SPECIFICATIONS

INPUT VOLTAGE: 12-24VDC
CURRENT: 15mA without a Sensor
 19mA with a DC PIR Sensor
 48mA with a DC Microwave Sensor
0-10V DIMMING: 12-24VDC
SIZE: 2.30in x 1.43in x 0.75in
 (58.2mm x 36.4mm x 19mm)
MOUNTING: Removable mounting tabs
WEIGHT: 0.45 oz (16g)
OPERATING TEMP: -22°F to +158°F (-30°C to + 70°C)


RADIO FREQUENCY: 2.4GHz
WIRELESS STANDARD: BLE 4.2 with Mesh
POINT TO POINT RANGE*: 80ft with obstructions
 350ft unobstructed
SECURITY: AES 128-bit encryption for device to device communication
 AES 256-bit encryption for device to cloud communication
WARRANTY: 5 years; 10 years optional
REGULATORY: FCC: 2AFZI-AVI1010 B
 IC: 20544-AVI1010 B
 BQB: D031801, DID: 86303
 UL 916, 2043 (Plenum Rated)

*When communicating through the mesh, range is essentially unlimited (5000ft+)

WIRING DIAGRAM

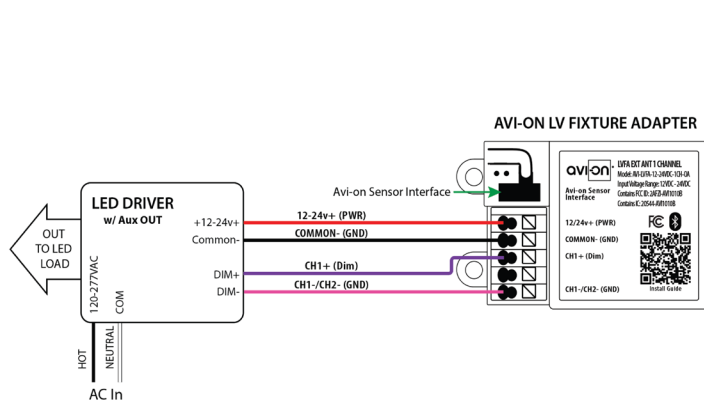

Fixture adapter powered by LED driver auxiliary output

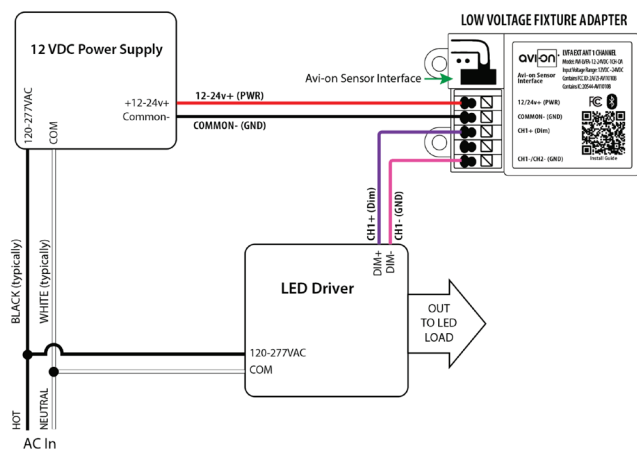

Fixture adapter connected to LED driver and using power supply

FEATURE

- **Installation:** Factory or Field Install End Mount to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual) and Daylight Harvesting
- **Room and Zone Control:** Zoning and Grouping control, Scheduling




SPECIFICATIONS

SENSOR TYPE: Passive Infrared Sensor (PIR)
WIRELESS STANDARDS: Bluetooth SIG Mesh
INPUT VOLTAGE: 120/277VAC
CONTROL OUTPUT: 0-10V
OPERATING TEMP: -40°F ~ +167°F (-40°C ~ +75°C)



COMMISSIONING RANGE: 50FT
BLUETOOTH RANGE: Integral antenna up to 100FT
DETECTION ANGLE: Vertical 90° x Horizontal 360°
MOUNTING HEIGHT: 8 - 40FT
WARRANTY: 5 years
IP RATING: IP20 Damp

DIMENSIONS

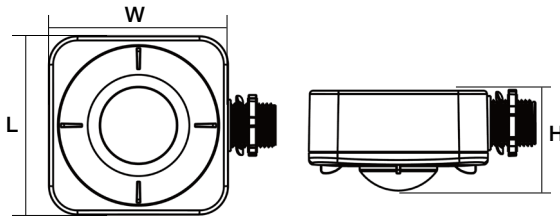

L	W	H
3.19" (81mm)	4.02" (102mm)	1.70" (43.3mm)

COVERAGE PATTERNS

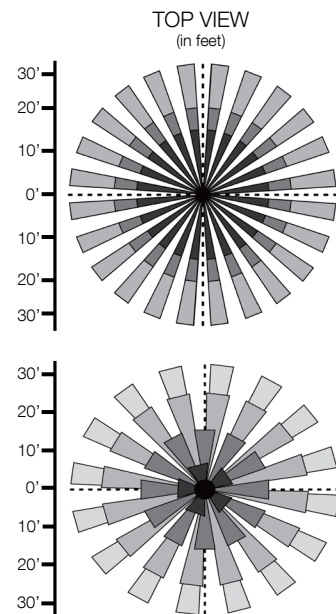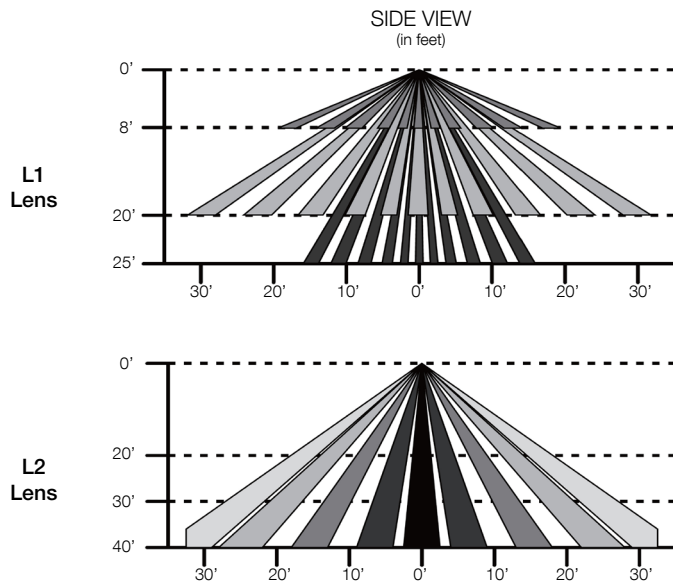

FEATURE

- **Installation:** Factory Install - Integral to Fixture
- **Commissioning:** Wirelessly through ALS Control Mobile App (iOS / Android)
- **Certification:** DLC 5.1 Networked Lighting Control System
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, Code-compliant manual-on or auto-off capability
- **Sensor:** Motion (Occupancy/Vacancy/Manual)
- **Room and Zone Control:** Zoning and Grouping control, Scheduling




SPECIFICATIONS

SENSOR TYPE: Microwave
WIRELESS STANDARDS: Bluetooth SIG Mesh
INPUT VOLTAGE: 10-14VDC, >50mA
CONTROL OUTPUT: 0-10V
OPERATING TEMP: -40°F ~ +158°F (-40°C ~ +70°C)

COMMISSIONING RANGE: 50FT
BLUETOOTH RANGE: Integral antenna up to 164FT
DETECTION ANGLE: 360°
MOUNTING HEIGHT: Up to 13FT
WARRANTY: 5 years
IP RATING: IP20

DIMENSIONS

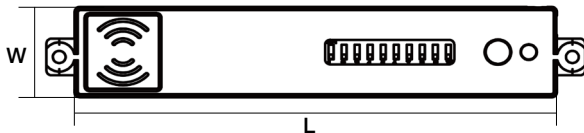

L	W
3.70" (94mm)	0.73" (18.5mm)

COVERAGE PATTERNS

