

SENSOR-PH-PB-U BUTTON PHOTOCELL

Client:
 Project:
 Type:
 Quantity:

FEATURE


- **Installation:** Factory Install - Integral to Fixture
- **Control:** Hold time, High-Low setting, continuous Bi-level dimming, manual/auto - on/off
- **Sensor:** Dusk-to-Dawn Control

SPECIFICATIONS

SENSOR TYPE:	Photocell
INPUT VOLTAGE:	Universal 120-277VAC
ON-OFF LEVELS:	10 ~ 50LUX On (Dusk) 30 ~ 80LUX Off (Dawn)
POWER CONSUMPTION:	2W
OPERATING TEMP:	-40°F ~ +158°F (-40°C ~ +70°C)
RATED FREQUENCY:	50/60Hz
RATED LOADING:	Tungsten: 1000W Ballast: 1800VA
TIME DELAY:	2.3 - 10 seconds
RELATIVE HUMIDITY:	99%
WARRANTY:	5 years



DIMENSIONS

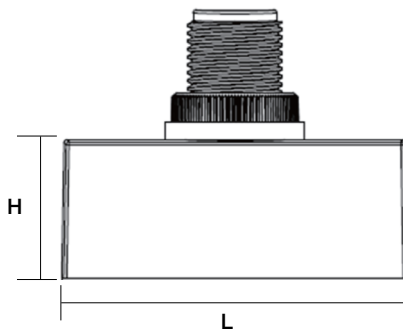

L	H
2.05" (52mm)	.91" (23mm)

