


CONTROL-XFAC BLUETOOTH CONTROLLER

Client:
 Project:
 Type:
 Quantity:

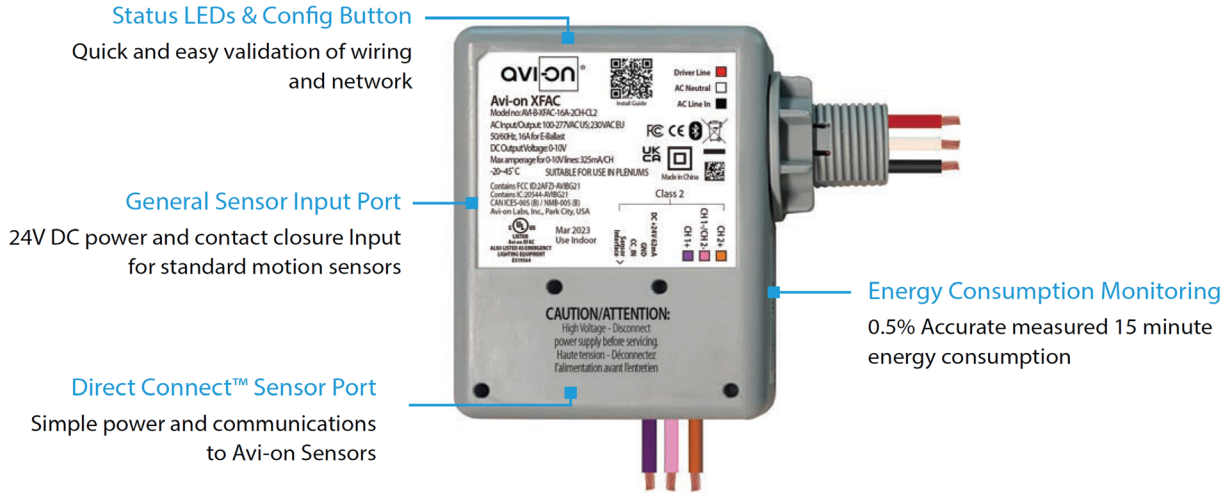

SPECIFICATIONS

INPUT VOLTAGE: 100-277VAC
CURRENT: MIN: 20 / 81mA
 MAX: 14 / 46mA
0-10V DIMMING: 100-277VAC
SIZE: 3.58" x 3.58" x 1.57"
 (91mm x 91mm x 40mm)
STORAGE TEMP: -40°F to + 185°F (-40°C to + 85°C)
OPERATING TEMP: -4°F to + 113°F (-20°C to + 45°C)

RADIO FREQUENCY: 50/60Hz
RELAY CURRENT: 16Amp
PROTECTION/IMMUNITY: LEVEL 4

Contact Discharge: ± 8kV
 Air Discharge: ±12kV
 325mA / CH
 5 years
 FCC: 2AFZI-AVIBG21
 IC: 20544-AVBG21
 QBQ: D059595, DID: 185220
 UL 924 ED.10, 2043 ED. 4

AMPERAGE FOR 0-10V LINES: 325mA / CH
WARRANTY: 5 years
REGULATORY: FCC: 2AFZI-AVIBG21
 IC: 20544-AVBG21
 QBQ: D059595, DID: 185220
 UL 924 ED.10, 2043 ED. 4

WIRING DIAGRAM

