



DL SERIES WET LOCATION DOWNLIGHT

Client:
Project:
Type:
Quantity:

CONSTRUCTION

Ultra low profile stamped aluminum body, entire fixture serves as heat sink for exceptional thermal management.

OPTICS

Drop down diffuse impact resistant polycarbonate lens offer glare-free uniform illumination.

Lens sealed with body to prevent dirty and splash of water from entry.

ELECTRICAL

90+ CRI high efficacy LED light engine secured on aluminum body.

120V, 50/60Hz input

Continuous dimming to 10% with standard incandescent dimmer and many LED rated dimmers.

Greater than 70% LED lumen maintenance at 50,000 hours.

MOUNTING

New Construction: Install onto standard Single Gang, 3" or 4" Round or Square J-Box.

STANDARD FINISH

Corrosion resistant matte White powder coating finish.

CERTIFICATION

Wet location label standard.

All luminaires are built to UL1598 standards and bear appropriate cETLus labels.

FCC Certified.

Energy Star Certified.

Title 24 compliant; see local ordinance for qualification information.

WARRANTY

5 year warranty, see Limited Warranty for additional information.



Back of fixture



Gasket Ring



Mounting Ring

SHIPPING DATA

| Product | Measurement | Weight |
|----------------|-------------------|--------|
| DL-15 (12 pcs) | 16"L x 11"W x 8"H | 8.4 lb |




DL SERIES WET LOCATION DOWNLIGHT

| ORDER INFORMATION | | | | EXAMPLE: DL 15 30 F WH S | | |
|--|------------------------|------------|--------|--------------------------|-----------|----------|
| Fixture | Series | Power & LM | CCT | Lens | Finish | Input |
| | DL | 15 | | F | WH | S |
| A SERIES | | | | | | |
| DL | Downlight | | | | | |
| B POWER & LM | | | | | | |
| CODE | TRIM | POWER | LM | | | |
| 15 | 6" | 15W | 1,200m | | | |
| C CCT | | | | | | |
| 27* | 2700K | | 40 | 4000K | | |
| 30 | 3000K | | 50 | 5000K | | |
| *2700K not standard stock, consult factory | | | | | | |
| D LENS | | | | | | |
| F | Frosted Lens | | | | | |
| E FINISH | | | | | | |
| WH | matte White finish | | | | | |
| F INPUT | | | | | | |
| S | 120V, 100%-10% Dimming | | | | | |

DL SERIES WET LOCATION DOWNLIGHT

DIMENSIONS

| Power | D1 | D2 | H |
|-------|-----------------|-----------------|--------------|
| 15W | Ø7.32" (Ø186mm) | Ø5.08" (Ø129mm) | 1.34" (34mm) |

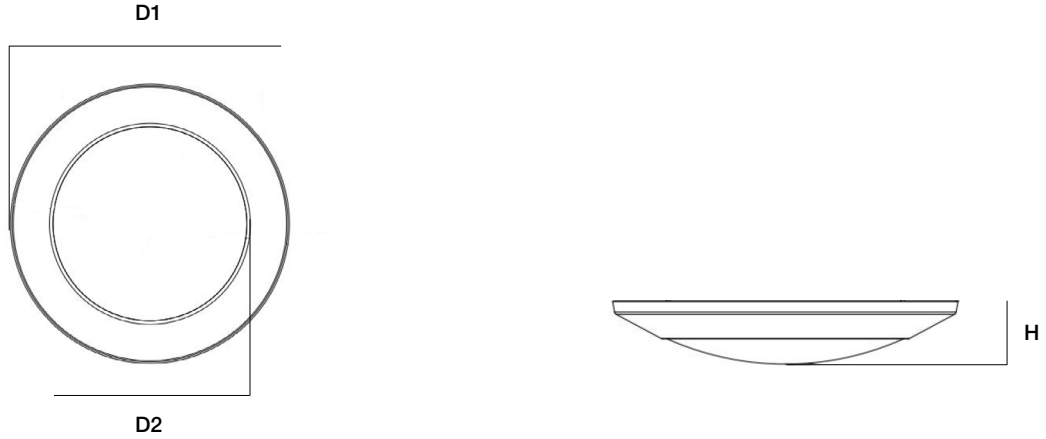

MOUNTING OPTIONS




30 Round Junction Box
(Plastic)



30 Square Junction Box
(Plastic)



40 Round Junction Box
(Metal)



40 Square Junction Box
(Metal)



DL SERIES WET LOCATION DOWNLIGHT

PERFORMANCE DATA

| SYSTEM WATTS | VOLTAGE | 3000K | | 4000K | | 5000K | | QTY ON PALLET |
|--------------|---------|--------|-----|--------|-----|--------|-----|---------------|
| | | LUMENS | LPW | LUMENS | LPW | LUMENS | LPW | |
| 15W | 120V | 1100 | 74 | 1155 | 77 | 1200 | 80 | 970 |