



# DL SERIES CCT SELECTABLE WET LOC DOWNLIGHT

Client:  
Project:  
Type:  
Quantity:

## CONSTRUCTION

Ultra low profile stamped aluminum body for 4" and 6" aperture application, entire fixture serves as heat sink for exceptional thermal management.

## OPTICS

Drop down diffuse impact resistant polycarbonate lens offer glare-free uniform illumination.

Lens sealed with body to prevent dirty and splash of water from entry.

## ELECTRICAL

90+ CRI high efficacy LED light engine secured on aluminum body.

120V, 50/60Hz input

Light engine selectable 2700K / 3000K / 3500K / 4000K / 5000K

Continuous dimming to 10% with standard incandescent dimmer and many LED rated dimmers.

Greater than 70% LED lumen maintenance at 50,000 hours.

Built-in motion sensor with programmable time delay for 1min / 5min / 10min.



Optional Motion Sensor

## MOUNTING

New Construction: Install onto standard Single Gang, 3" or 4" Round or Square J-Box.

Retrofit: Install onto standard Single Gang, 3" or 4" Round or Square J-Box, or use with 4", 5" or 6" recessed cans with torsion spring clips included.

## STANDARD FINISH

Corrosion resistant matte White finish.

## CERTIFICATION

Meets Buy America Act requirements (COTS).

Wet location.

All luminaires are built to UL1598 standards and bear appropriate cETLus labels.

FCC Certified.

Energy Star Certified.

JA8 Compliant.

Title 24 compliant; see local ordinance for qualification information.

## WARRANTY

5 year warranty, see Limited Warranty for additional information.

## SHIPPING DATA

Product	Measurement	Weight
DL-10 (12 pcs)	10"L x 9"W x 8"H	11 lb
DL-15 (12 pcs)	16"L x 9"W x 8"H	12 lb




**DL SERIES CCT SELECTABLE WET LOC DOWNLIGHT**

ORDER INFORMATION				EXAMPLE: DL 10 SC F WH SM		
Fixture	Series	Power & LM	CCT	Lens	Finish	Input
	<b>DL</b>		<b>SC</b>	<b>F</b>	<b>WH</b>	
<b>A</b>	<b>SERIES</b>					
	DL CCT Selectable Wet Location Downlight					
<b>B</b>	<b>POWER &amp; LM</b>					
	<b>CODE</b>	<b>TRIM</b>	<b>POWER</b>	<b>LM</b>		
	10	4"	10W	650lm		
	15	6"	15W	1,200lm		
<b>C</b>	<b>CCT</b>					
	SC CCT Selectable 2700K / 3000K / 3500K / 4000K / 5000K					
<b>D</b>	<b>LENS</b>					
	F Frosted Lens					
<b>E</b>	<b>FINISH</b>					
	WH matte White finish					
<b>F</b>	<b>INPUT</b>					
	S 120V, standard incandescent dimming					
	SM 120V, standard incandescent dimming, w/built-in programmable motion sensor (motion sensor spec on page 4)					
<b>G</b>	<b>ACCESSORIES/OPTIONS</b>					
	AIA Assembled in America, compliant with BAA (COTS)					

**DL SERIES CCT SELECTABLE WET LOC DOWNLIGHT**

**DIMENSIONS**

Power	D1	D2	H1
DL-10A	ø5.91" (ø150mm)	ø3.77" (ø96mm)	1.11" (28mm)
DL-15A	ø7.32" (ø186mm)	ø5.08" (ø129mm)	1.34" (34mm)

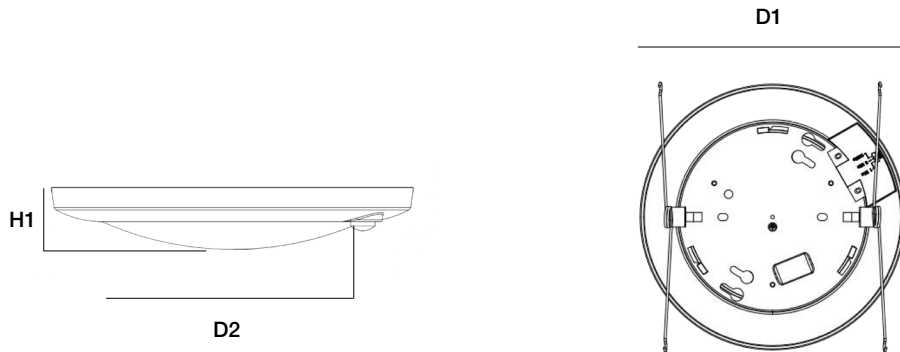

**MOUNTING OPTIONS**




30 Round Junction Box  
(Plastic)



30 Square Junction Box  
(Plastic)



40 Round Junction Box  
(Metal)



40 Square Junction Box  
(Metal)



4", 5" or 6" New Construction Housing  
(Metal)



4", 5" or 6" Remodel Housing  
(Metal)



## DL SERIES CCT SELECTABLE WET LOC DOWNLIGHT

### PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	LUMENS	LPW	QTY ON PALLET
10W	120V	880	88	1067
15W	120V	1200	80	970

### MOTION SENSOR SETTING - DIP SWITCH

TIME DELAY SETTING	SENSOR LENS ANGLE	MOUNTING HEIGHT	COVERAGE
1 MIN	65°	MAX 14FT	14FT DIAMETER @ 14FT MOUNTING
5 MIN			
10 MIN			